

SEG-6PB-xxxBB

SERIES 6 INCH 60 CELLS



SERAPHIM
ENERGY GROUP

265~280_w

Safety



Resistance to salt mist corrosion at your request



Resistance to ammonia corrosion at your request



Product is certified by UL1703

Reliability



Anti-PID products using advanced module technology



World 1st company to pass "Thresher Test" and "On-site Power Measurement Validation" certificate




Bankable products


Performance




High efficiency and enhanced module durability




Outstanding power output capability at low irradiance



Withstand up to 2400Pa wind and 5400Pa snow loads(IEC), long lasting

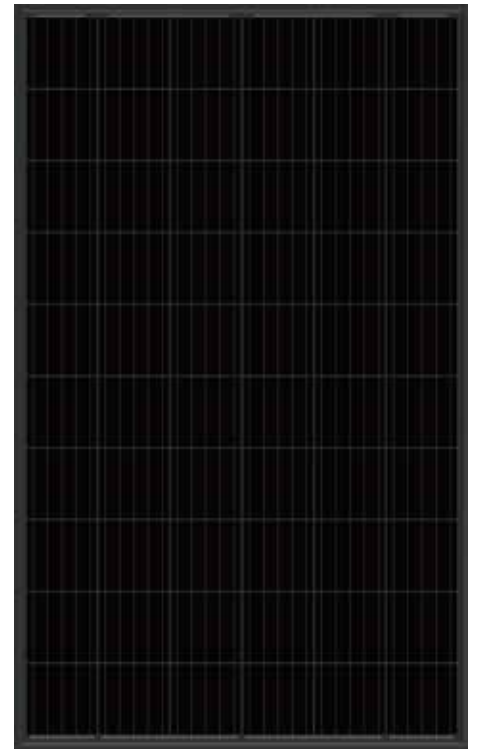

WARRANTY

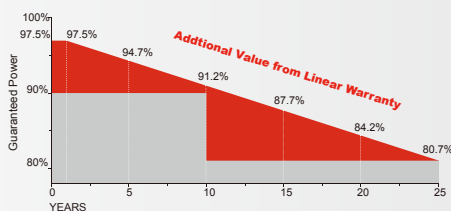

10
YEARS

Guarantee on product material and workmanship

25
YEARS

Linear power output warranty

MANAGEMENT SYSTEM

ISO 9001: Quality management system

ISO 14001: Standard for environmental management system

OHSAS 18001: International standard for occupational health and safety assessment system

PRODUCT CERTIFICATES



INSURANCE



Specifications are subject to change without notification SEG-DS-EN-2019V1.1 © Copyright 2019 Seraphim

SERAPHIM ENERGY GROUP, INC.

SEG-6PB-XXXBB SERIES 6 INCH 60 CELLS



BB : BLACK BACK-SHEET / BLACK FRAME PRODUCTS

Electrical Characteristics(STC)

Module Type	SEG-6PB-265BB	SEG-6PB-270BB	SEG-6PB-275BB	SEG-6PB-280BB
Maximum Power at STC - P_{mp} (W)	265	270	275	280
Open Circuit Voltage - V_{oc} (V)	38.3	38.5	38.8	39.0
Short Circuit Current - I_{sc} (A)	8.83	8.94	9.02	9.12
Maximum Power Voltage - V_{mp} (V)	31.1	31.3	31.6	31.8
Maximum Power Current - I_{mp} (A)	8.53	8.63	8.71	8.81
Module Efficiency STC- η_m (%)	16.29	16.6	16.9	17.2
Power Tolerance (W)	(0,+4.99)			
Maximum System Voltage (V)	1000 or 1500(UL)			
Maximum Series Fuse Rating (A)	15			
Fire Performance	Type2 or Type1(UL)			

Electrical Characteristics(NOCT)

Module Type	SEG-6PB-265BB	SEG-6PB-270BB	SEG-6PB-275BB	SEG-6PB-280BB
Maximum Power at NOCT - P_{mp} (W)	196	200	203	206
Open Circuit Voltage - V_{oc} (V)	35.3	35.5	35.7	35.9
Short Circuit Current - I_{sc} (A)	7.14	7.22	7.29	7.36
Maximum Power Voltage - V_{mp} (V)	29.1	29.3	29.5	29.7
Maximum Power Current - I_{mp} (A)	6.74	6.83	6.88	6.94

Temperature Characteristics

Pmax Temperature Coefficient	-0.39%/°C
Voc Temperature Coefficient	-0.30 %/°C
Isc Temperature Coefficient	+0.05 %/°C
Operating Temperature	-40~+85 °C
Nominal Operating Cell Temperature (NOCT)	45±2 °C



Packing Configuration

	1640x 992 x 35mm(64.57x39.06x1.37 inch)	
Container	20'GP	40'GP
Pieces per Pallet	30	30
Pallets per Container	12	28
Pieces per Container	360	840

Mechanical Specifications

External Dimensions	1640 x 992 x 35 mm(64.57x39.06x1.37 inch)
Weight	17.5 kg(38.5 lbs)
Solar Cells	Poly crystalline, 6 inch (60pcs.)
Front Glass	3.2 mm AR coating tempered glass, low iron
Frame	Anodized aluminium alloy
Junction Box	IP67
Output Cables	12AWG,cable length:1000 mm
Connector	MC4 Compatible

STC: Irradiance 1000 W/m², module temperature 25°C, AM=1.5
 NOCT: Irradiance 800 W/m², ambient temperature 20°C, wind speed :1m/s
 Specifications are subject to change without further notification.

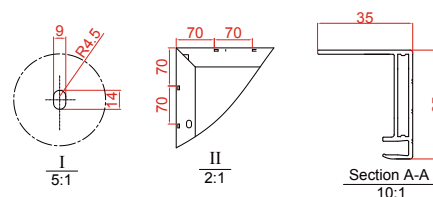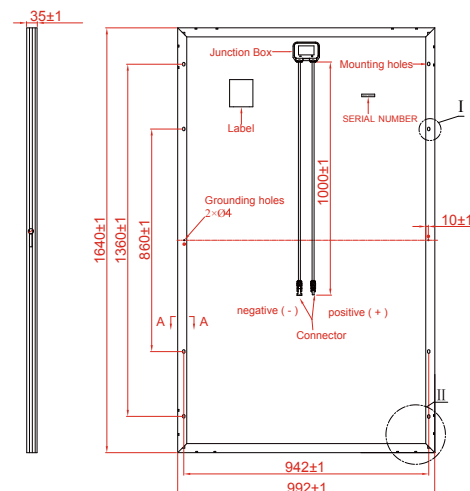

* All Dimensions in mm

* The above drawing is a graphical representation of the product.

I-V Curve

